


Question #4 (30pt):

- a) Compute the shortest path from A to all other network nodes using Dijkstra's shortest-path algorithm. Show how the algorithm works by computing a table similar to table shown below.

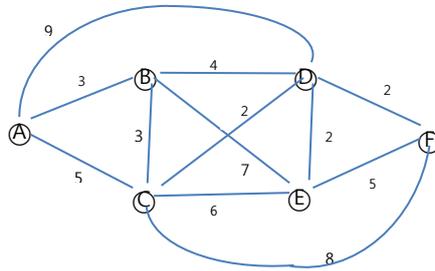

Iteration	T	L(2)	Path	L(3)	Path	L(4)	Path	L(5)	Path	L(6)	Path
1	{1}	2	1-2	5	1-3	1	1-4	∞	—	∞	—
2	{1, 4}	2	1-2	4	1-4-3	1	1-4	2	1-4-5	∞	—
3	{1, 2, 4}	2	1-2	4	1-4-3	1	1-4	2	1-4-5	∞	—
4	{1, 2, 4, 5}	2	1-2	3	1-4-5-3	1	1-4	2	1-4-5	4	1-4-5-6
5	{1, 2, 3, 4, 5}	2	1-2	3	1-4-5-3	1	1-4	2	1-4-5	4	1-4-5-6
6	{1, 2, 3, 4, 5, 6}	2	1-2	3	1-4-5-3	1	1-4	2	1-4-5	4	1-4-5-6

- b) Why does the Link state protocol using Dijkstra algorithm have “route oscillation pathology” problem?